

---

AP1X6-BF

---

LumCAT: AP1X6-BF	Luminaire:
Report No:	Voltage(V): 240.500
Test No:	Current(A): 0.037
LampCAT: :	Power (W): 7.700
Lamp flux(lm): -1.0	PF: 0.869
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0

---

Photometric Results

---



Lumens(lm): 758.80  
Efficiency(%): 0.00%  
Lumens(lm)/Power(W): 98.54  
Central intensity(cd): 2542.235  
Maximum intensity(cd): 2583.728  
Angle of maximum intensity: C=90.0  $\gamma$ =0.0  
Beam Angle(50%Imax): [H]Left=8.4 Right=8.8  
                                  [V]Left=8.1 Right=8.5  
Field angle(10%Imax): [H]Left=35.9 Right=35.5  
                                  [V]Left=34.6 Right=35.7  
IES Classification : TypeI  
Longitudinal Classification : VeryShort  
Cut Off Classification : FullCutoff  
Max Cd(At 90°Vert) : 1.720461  
Max Cd(80 to 90°Vert) : 3.339719  
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire  
Street Side DownWard Lumens: - -of lamp 51.91%of Luminaire  
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire  
House Side DownWard Lumens: - -of lamp 48.09%of Luminaire

---


Equipment:  
Temperature(°C): 0.0


Date: 2016-1-6  
Humidity(%): 0.0%

Operator: GM  
Distance(m): 10.06

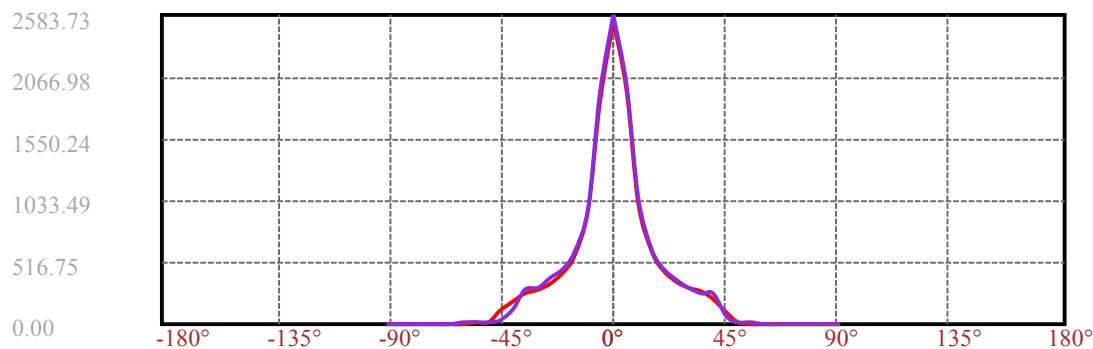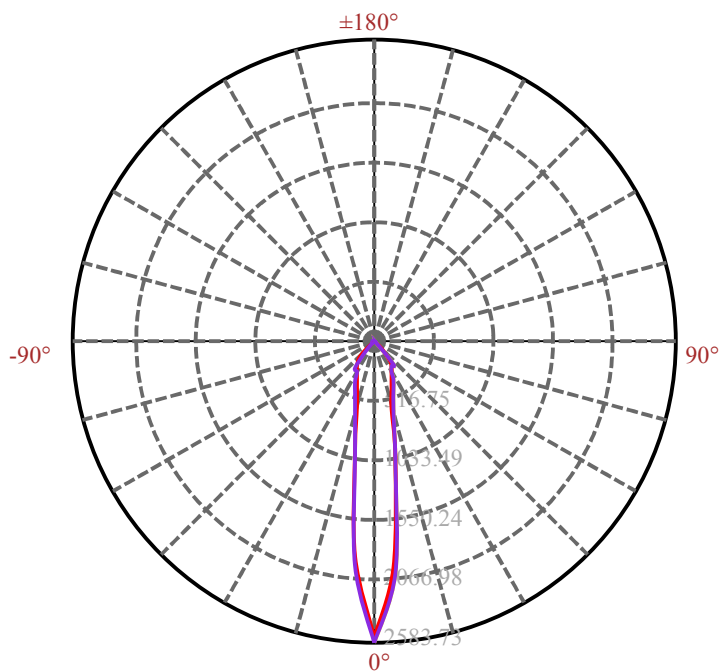

C90(Max): ———  
C0/C180: ———  
C90/C270: ———

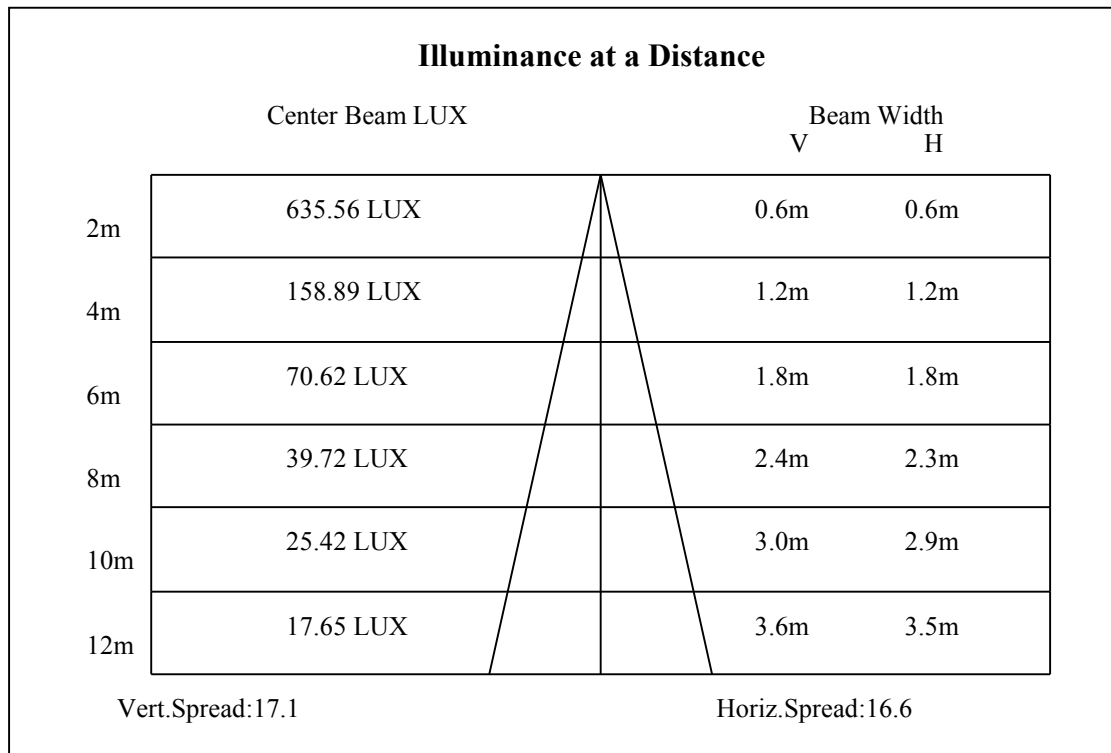

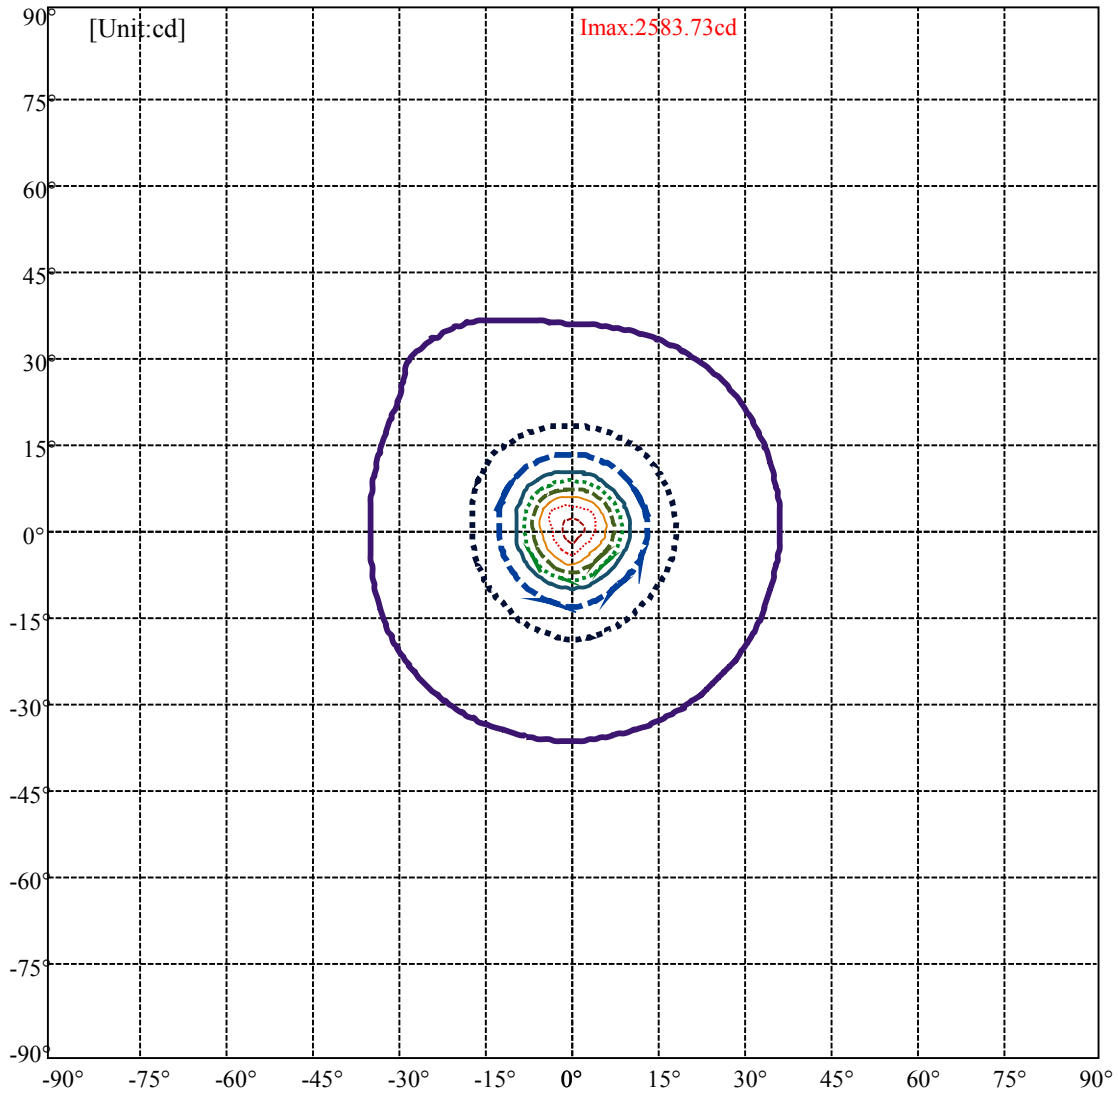

(10%Imax) 258.373	———
(20%Imax) 516.746	.....
(30%Imax) 775.118	- - - - -
(40%Imax) 1033.49	———
(50%Imax) 1291.86	.....
(60%Imax) 1550.24	- - - - -
(70%Imax) 1808.61	———
(80%Imax) 2066.98	.....
(90%Imax) 2325.36	- - - - -