Caracteristicas tecnicas / *Technical data*

Alimentación/*power supply*	12V/ac
Tipo de control/*dimmmable surpport*	Señal tren de pulso
Material/*mounting sleeven*	Aluminum
Medidas Mando/*remote control dimensions*	132x52mm
Medidas Receptor/*Receiver dimensions*	160x71x26mm

Referencia *Reference*	Consumo *Consume*	Tensión *Voltage*	Cant. Max. Bombillas *Number of bulbs*	Largo Max.cable *Maximum wire*
RGBCONTROLLER16	8W	12Vac	20	100
AMPCONTROLLER	8W	12Vac		

MEDIDAS/ *DIMENSIONS*

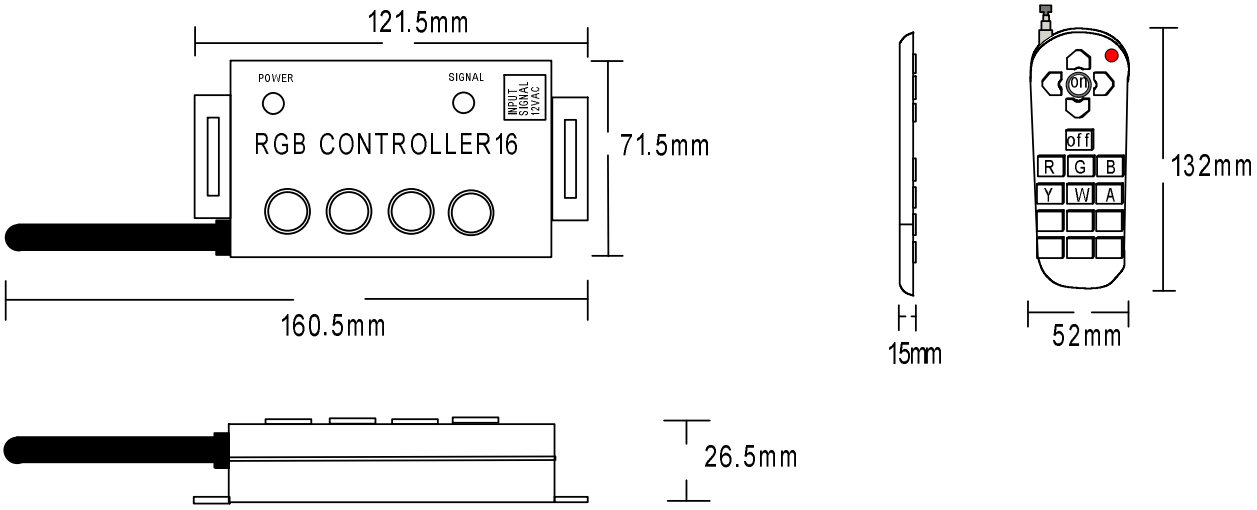

C/ Arabia 24, Pol.Ind. Congost 08520 Les Franqueses del Valles -Barcelona -España Tel: +34 938.615.115

e-mail: light@bsvelectronic.com www.bslight.es www.bsvelectronic.com

ESQUEMA DE CONEXION RGB /*RGB CIRCUIT DIAGRAM*

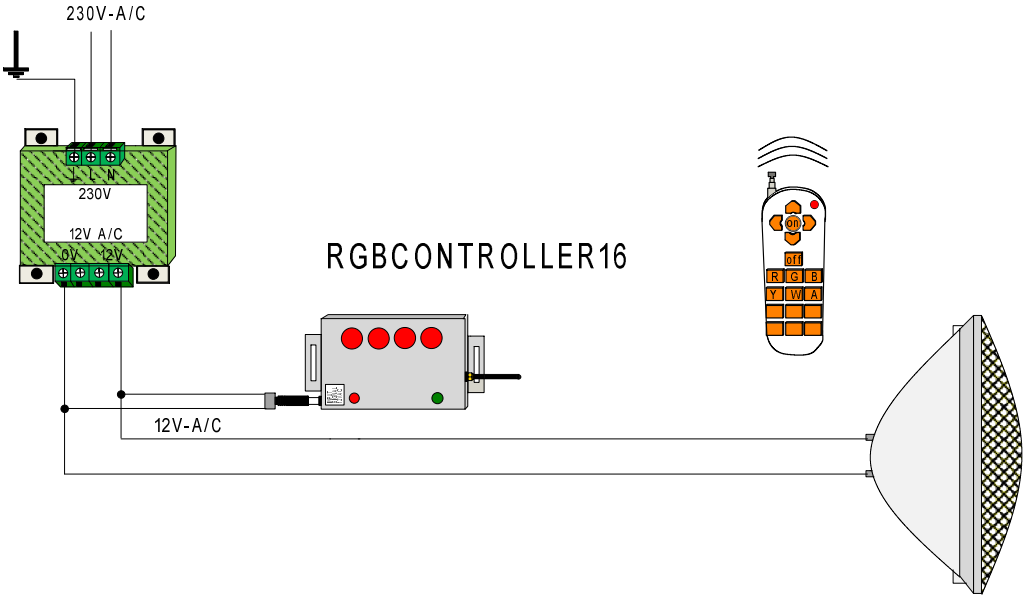

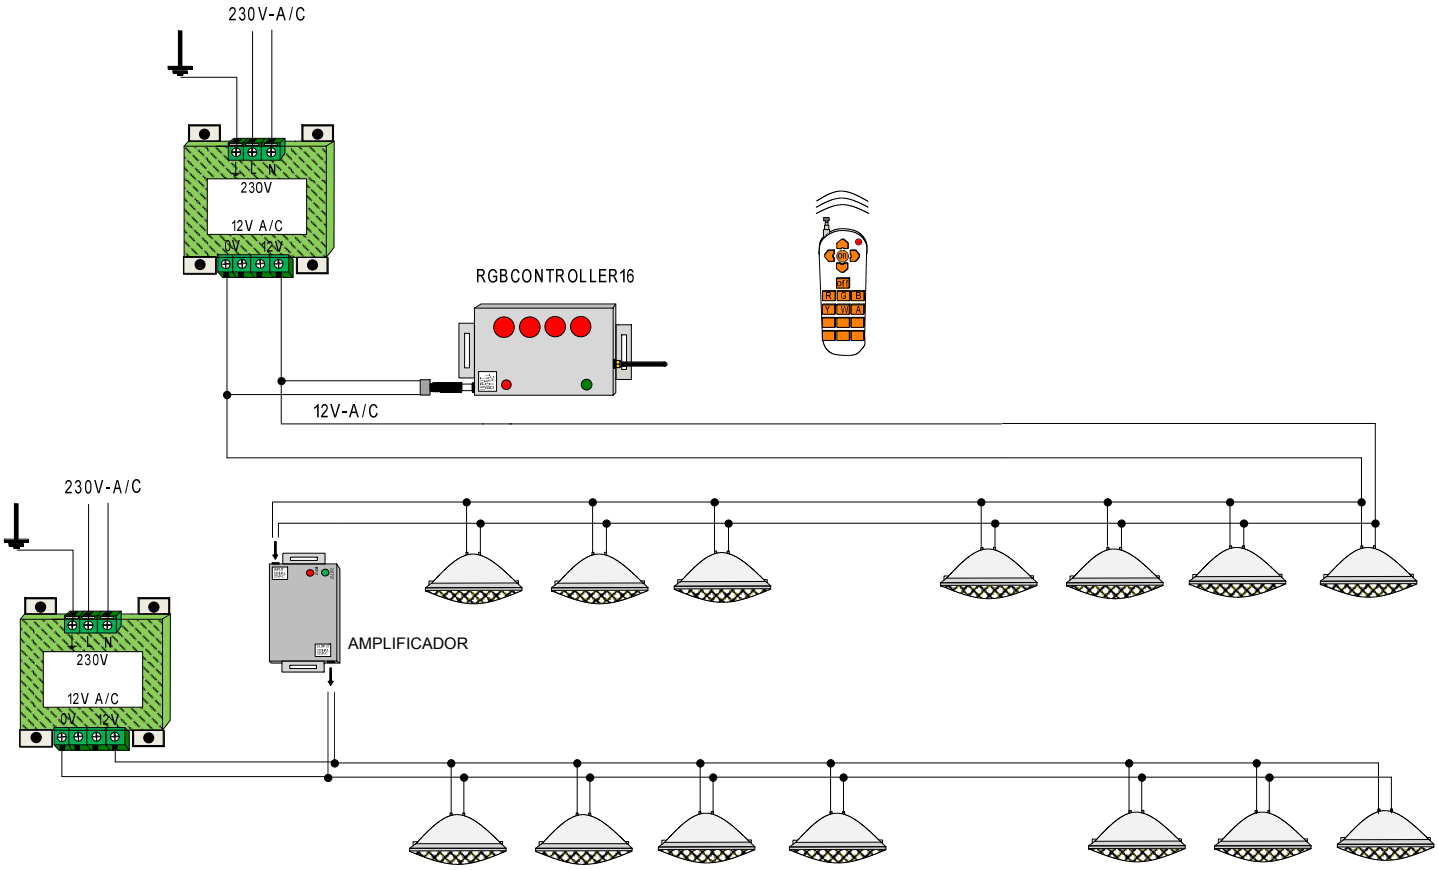

Controlador específico para bombilla PAR56, mini proyector y Proyector de superficie

RGB serie 16 de BSLIGHT.

INSTRUCCIONES PROGRAMACIÓN

Paso 1

Conecte el controlador RGBCONTROLLER16 a la salida del transformador 12VAC.

Pulsar la tecla ˆon/offˇ del receptor y la tecla "Off" del mando a distancia durante 3 segundos (los dos al mismo tiempo) . Se escuchará un pitido más largo que significara que el receptor y el mando emisor ya están codificados entre ellos.

Specific controller for PAR56 bulb, Mini projector and Surface projector

RGB series 16 of BSLIGHT.

INSTRUCTIONS PROGRAMMING

Step 1

Connect the RGBCONTROLLER16 controller to the output of the 12VAC transformer.

Press the "on / off" button on the receiver and the "Off" button on the remote control for 3 seconds (both at the same time). A longer beep will sound which means that the receiver and the transmitter command are already encoded between them.

Tecla On/Off del receptor y Tecla Off del mando

Paso 2

Pulsar la tecla ˆon/offˇ y la tecla "speed/briight+" del receptor durante 3 segundos hasta escuchar una señal acústica (los dos al mismo tiempo) . El receptor emitirá una señal acústica intermitente y todas las lámparas cambiaran a color rojo > verde> azul. Ya se puede utilizar el mando.

Step 2

Press the "on / off" key and the "speed / briight +" key of the receiver for 3 seconds until you hear an acoustic signal (both at the same time). The receiver will emit an intermittent acoustic signal and all lamps will change to red –> green–> blue. The control can now be used.

PRESIONAR "ON/OFF" y PRESIONAR "SPEED/BRIGHT" DURANTE 3 SEGUNDOS AMBOS AL MISMO TIEMPO
PRESS "ON / OFF" FOR 3 SECONDS PRESS "SPEED / BRIGHT" FOR 3 SECONDS AT THE SAME TIME

C/ Arabia 24, Pol.Ind. Congost 08520 Les Franqueses del Valles -Barcelona -España Tel: +34 938.615.115
e-mail: light@bsvelectronic.com www.bslight.es www.bsvelectronic.com