
LumCAT: ES3X2A-BF Luminaire:

Report No:

Test No:

LampCAT:

Lamp flux(lm): -1.0

Number of Lamps: 0

Length(mm): 0

Phm Type: C

Voltage(V): 240.1000

Current(A): 0.0340

Power (W): 5.7000

PF: 0.7000

Ballast type:

Width(mm): 0

Height(mm): 0

Photometric Results

Lumens(lm): 398.61

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 69.93

Central intensity(cd): 550.747

Maximum intensity(cd): 564.453

Angle of maximum intensity: C=180.0 γ =5.0

Beam Angle(50%Imax): [V]Left=23.5 Right=22.1

[H]Left=18.2 Right=27.9

Field angle(10%Imax): [V]Left=39.6 Right=39.7



[H]Left=34.9 Right=46.9

Effective flux(lm): 351.49


Equipment:
Temperature(°C): 0.0


Date: 2020/5/6
Humidity(%): 0.0%

Operator: QZF
Distance(m): 10.19

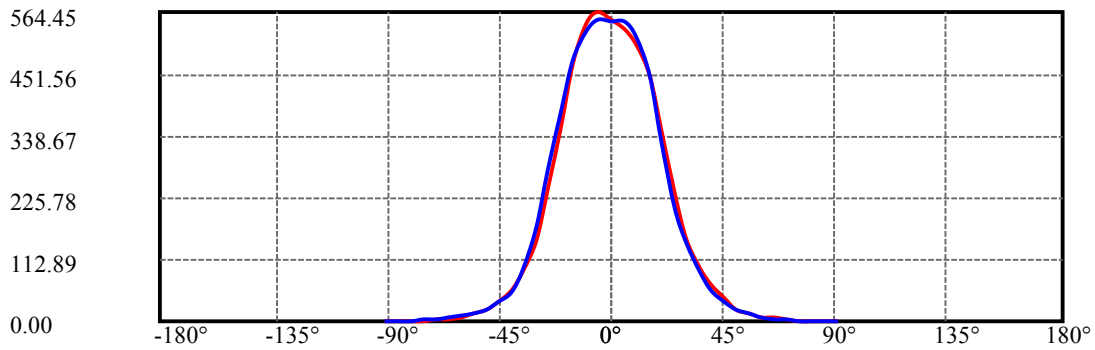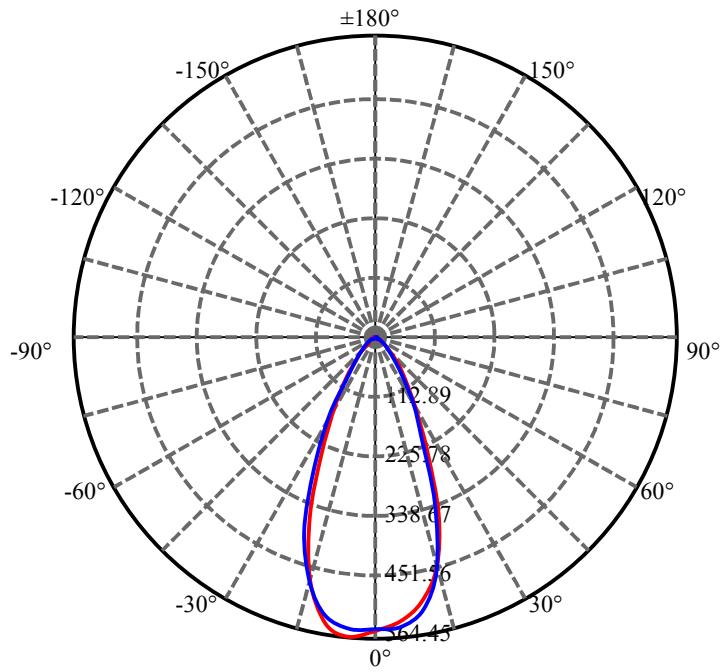

H=0 ———
V=0 ———

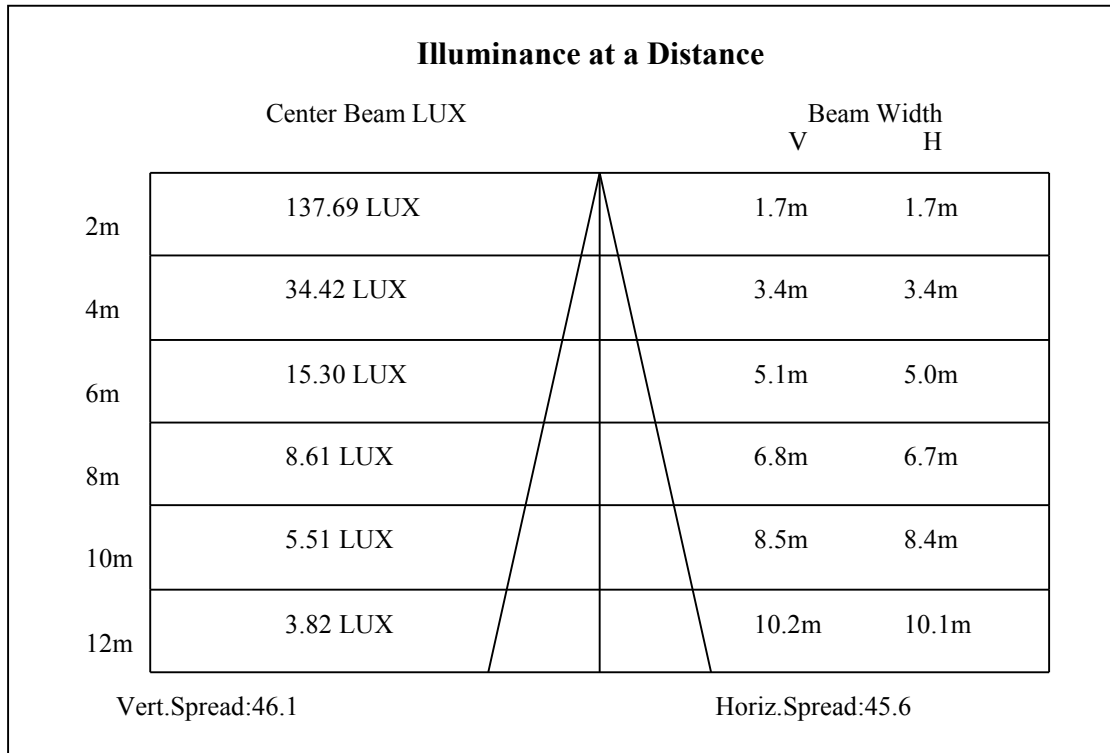

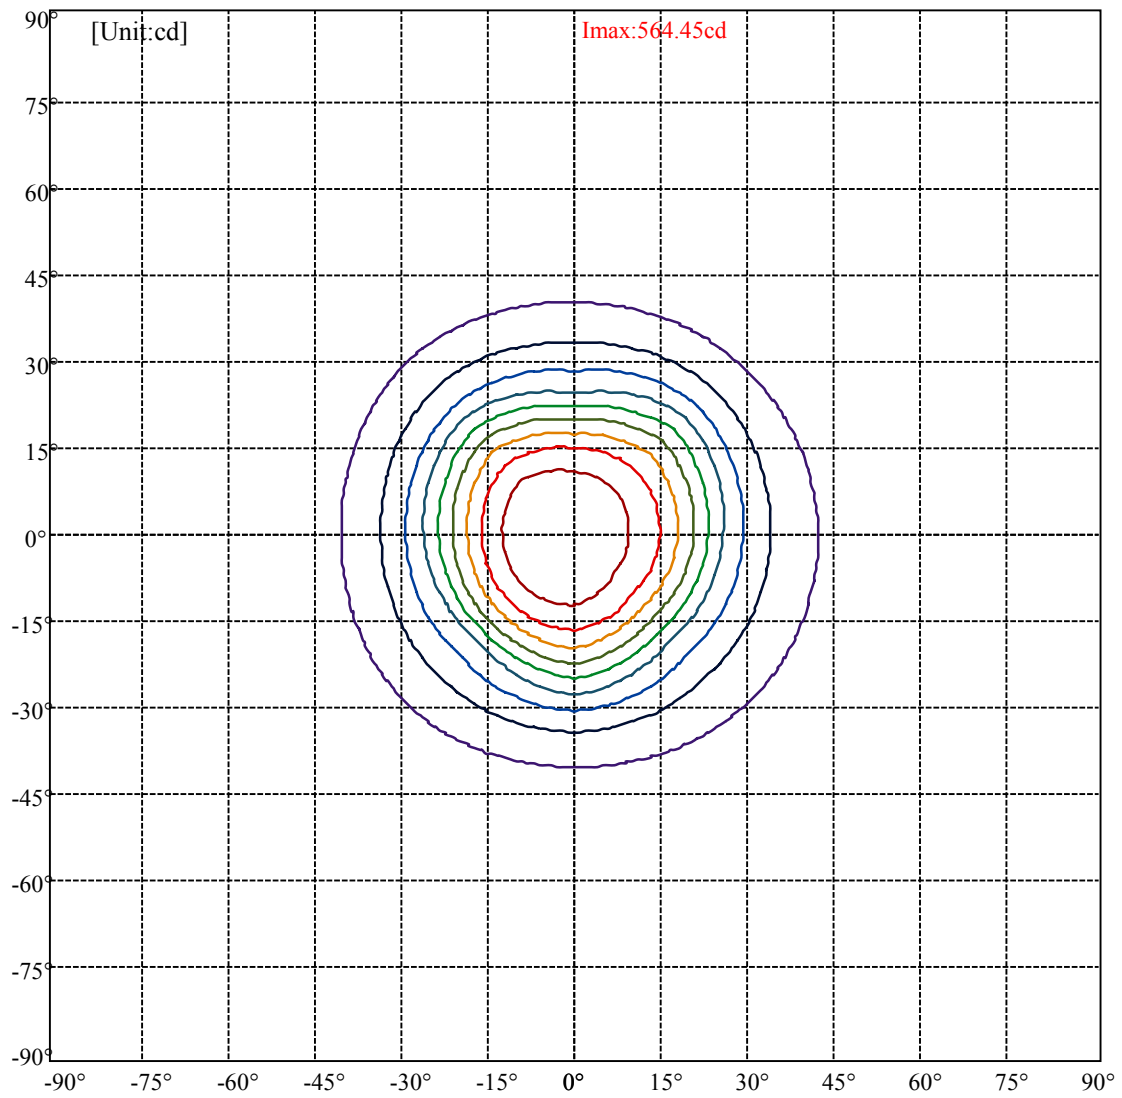

(10%Imax) 56.4453	—
(20%Imax) 112.891	—
(30%Imax) 169.336	—
(40%Imax) 225.781	—
(50%Imax) 282.226	—
(60%Imax) 338.672	—
(70%Imax) 395.117	—
(80%Imax) 451.562	—
(90%Imax) 508.008	—