
LumCAT: ES3X2S-BCLuminaire:

Report No:

Test No:

LampCAT:

Lamp flux(lm): -1.0

Number of Lamps: 0

Length(mm): 0

Phm Type: C

Voltage(V): 240.1000

Current(A): 0.0330

Power (W): 5.7000

PF: 0.7000

Ballast type:

Width(mm): 0

Height(mm): 0

Photometric Results

Lumens(lm): 399.03

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 70.00

Central intensity(cd): 1472.188

Maximum intensity(cd): 1490.256

Angle of maximum intensity: C=135.0 γ =0.0

Beam Angle(50%Imax): [V]Left=12.3 Right=13.6

[H]Left=11.5 Right=14.1

Field angle(10%Imax): [V]Left=25.0 Right=24.7



[H]Left=23.9 Right=26.4

Effective flux(lm): 323.96


Equipment:
Temperature(°C): 0.0


Date: 2020/5/6
Humidity(%): 0.0%

Operator: QZF
Distance(m): 10.19

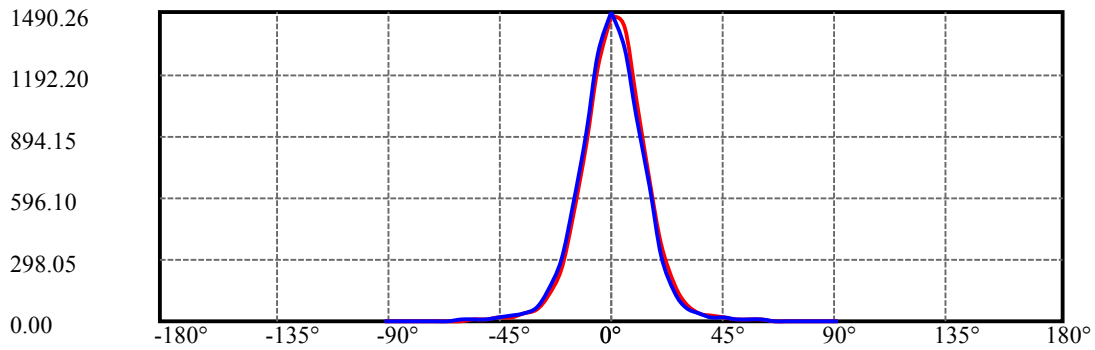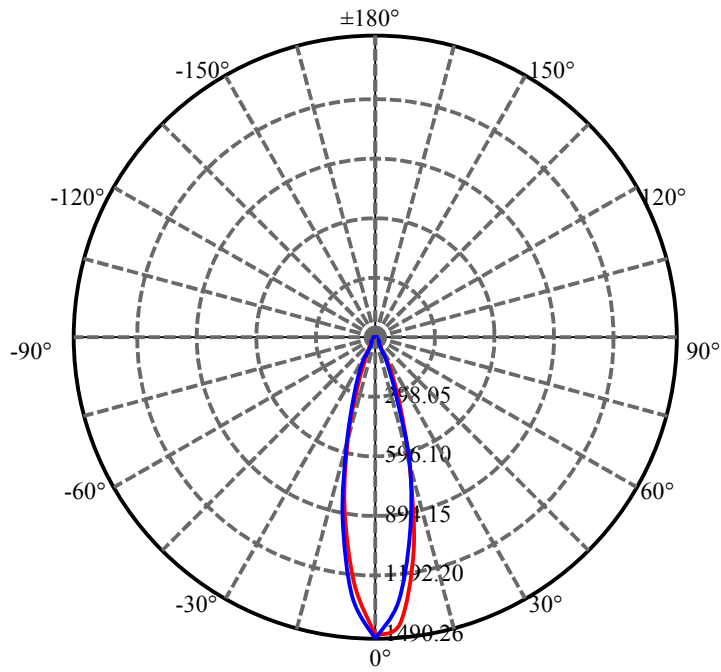

H=0 ———
V=0 ———

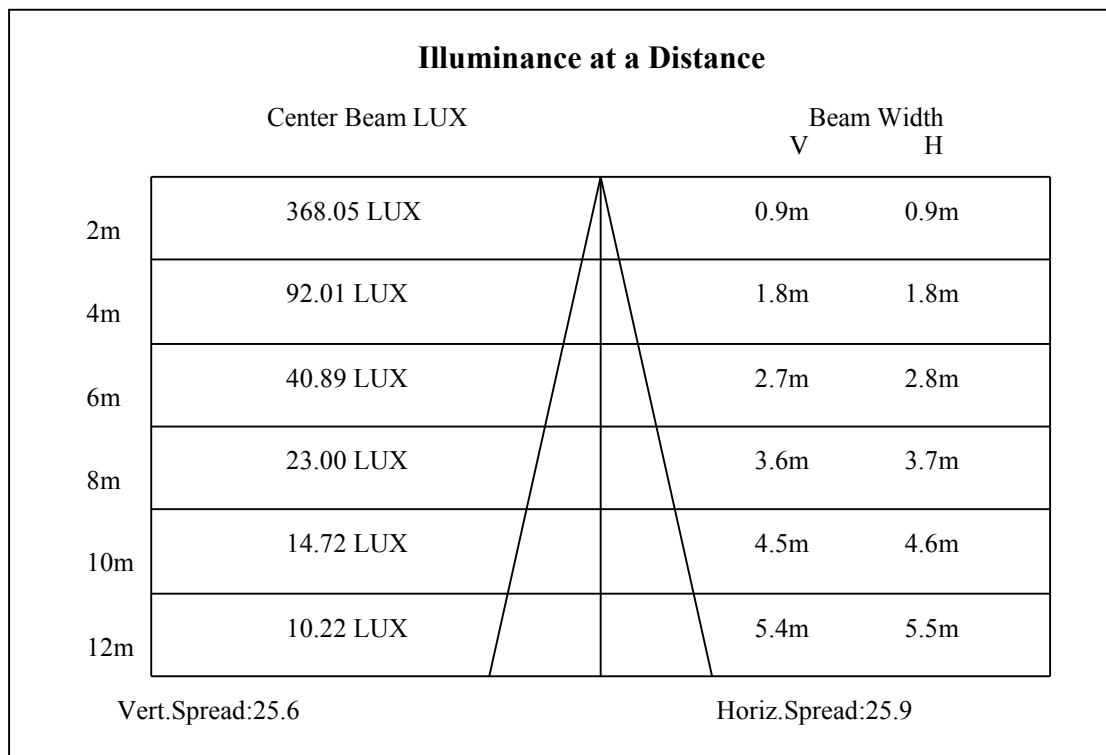

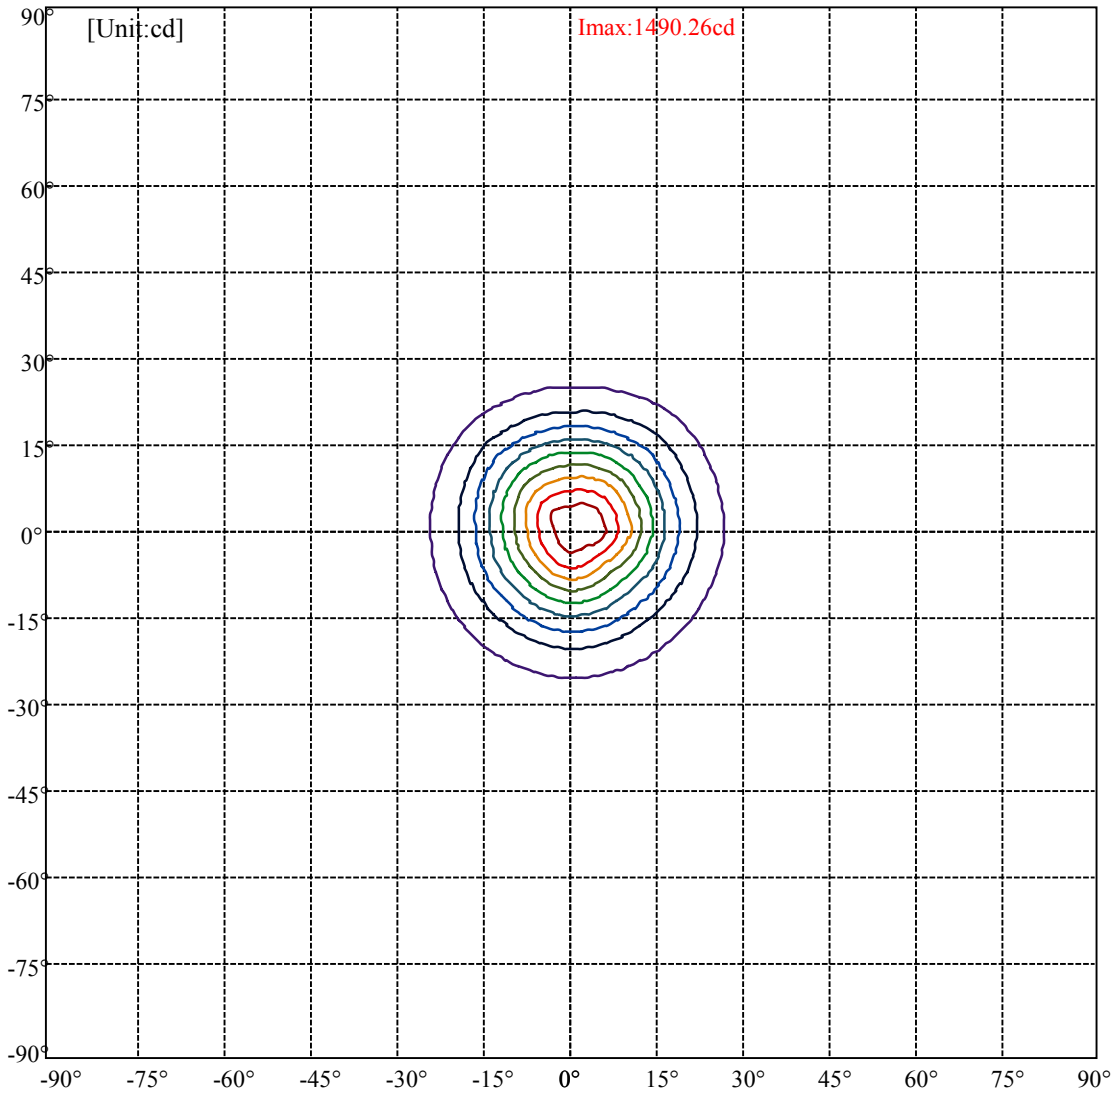

(10%Imax) 148.911	—
(20%Imax) 297.823	—
(30%Imax) 446.734	—
(40%Imax) 595.645	—
(50%Imax) 744.557	—
(60%Imax) 893.468	—
(70%Imax) 1042.38	—
(80%Imax) 1191.29	—
(90%Imax) 1340.2	—