
LumCAT: ES3X2S-RGB

Luminaire:

Report No:

Voltage(V): 24.0000

Test No:

Current(A): 0.2760

LampCAT:

Power (W): 6.6000

Lamp flux(lm): -1.0

PF: 1.0000

Number of Lamps: 0

Ballast type:

Length(mm): 0

Width(mm): 0

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 204.92

Efficiency(%): 0.00%

Lumens(lm)/Power(W): 31.05

Central intensity(cd): 550.785

Maximum intensity(cd): 561.436

Angle of maximum intensity: C=0.0 γ =0.0

Beam Angle(50%Imax): [V]Left=12.2 Right=15.7

[H]Left=13.8 Right=13.6

Field angle(10%Imax): [V]Left=29.4 Right=32.3



[H]Left=29.8 Right=30.0

Effective flux(lm): 159.78

Equipment:
Temperature(°C): 0.0

Date: 2017/1/9
Humidity(%): 0.0%

Operator: GM
Distance(m): 10.12

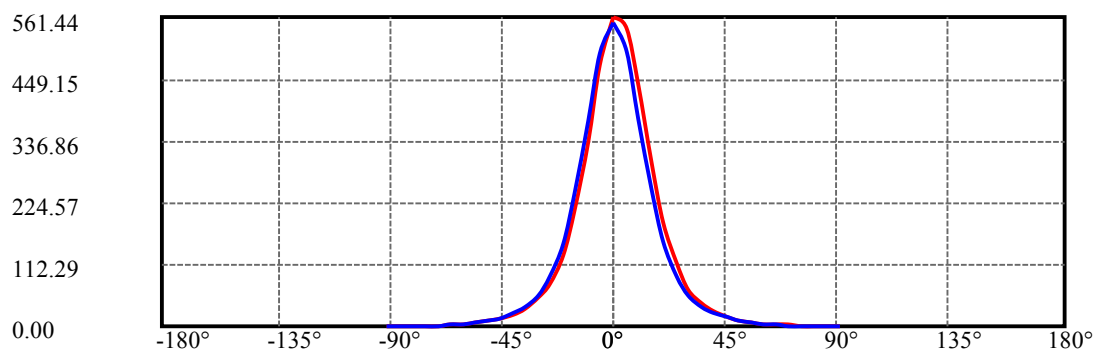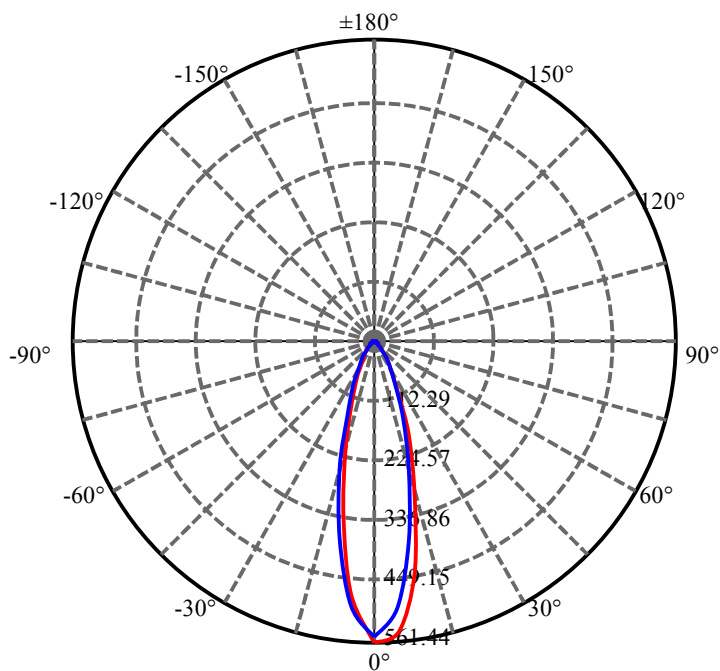

V=0 ———

H=0 ———

