
ET6x0,5-4A-BC

LumCAT: ET6x0,5-4A-B
Report No:
Test No:
LampCAT: : name Lamp
flux(lm): -1.0 Number of
Lamps: 1 Length(mm): 0
Phm Type: C

Luminaire:
Voltage(V): 230.100
Current(A): 0.036
Power (W): 3.900
PF: 0.469
Ballast type:
Width(mm): 0
Height(mm): 0



Photometric Results

Lumens(lm): 15.91
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 4.08
Central intensity(cd): 0.522
Maximum intensity(cd): 3.656
Angle of maximum intensity: C=270.0 γ =60.0
Beam Angle(50%Imax): [H]Left=28.2 Right=30.5
[V]Left=88.3 Right=87.8
Field angle(10%Imax): [H]Left=29.6 Right=149.6
[V]Left=89.7 Right=89.6
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 2.61121
Max Cd(80 to 90°Vert) : 2.924555
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 48.80%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 51.20%of Luminaire


Equipment:
Temperature(°C): 0.0


Date: 2013-11-12
Humidity(%): 0.0%

Operator: Opr
Distance(m): 10.22

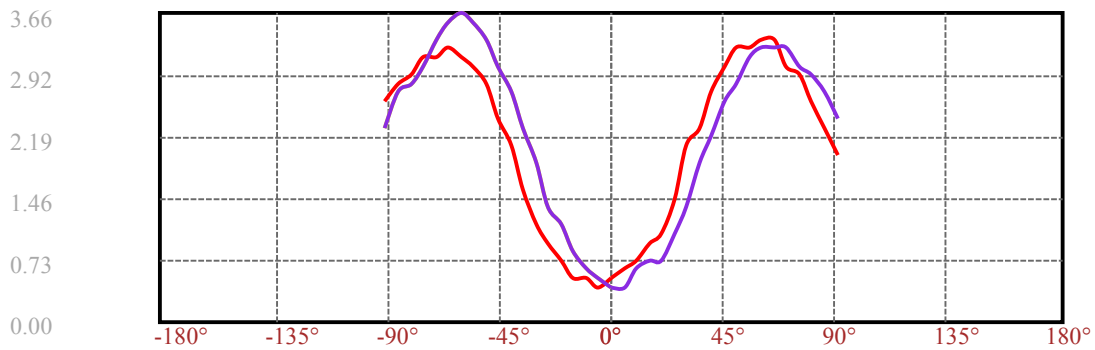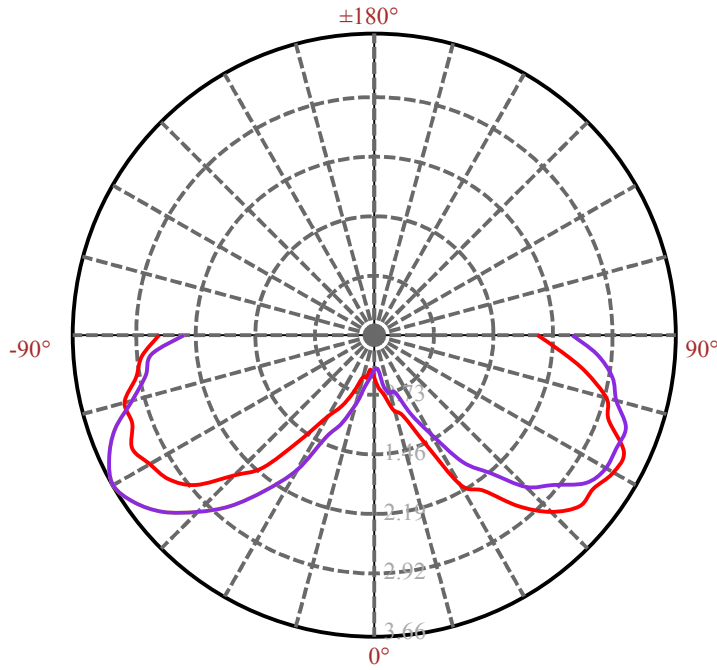

C270(Max): —
C0/C180: —
C90/C270: —

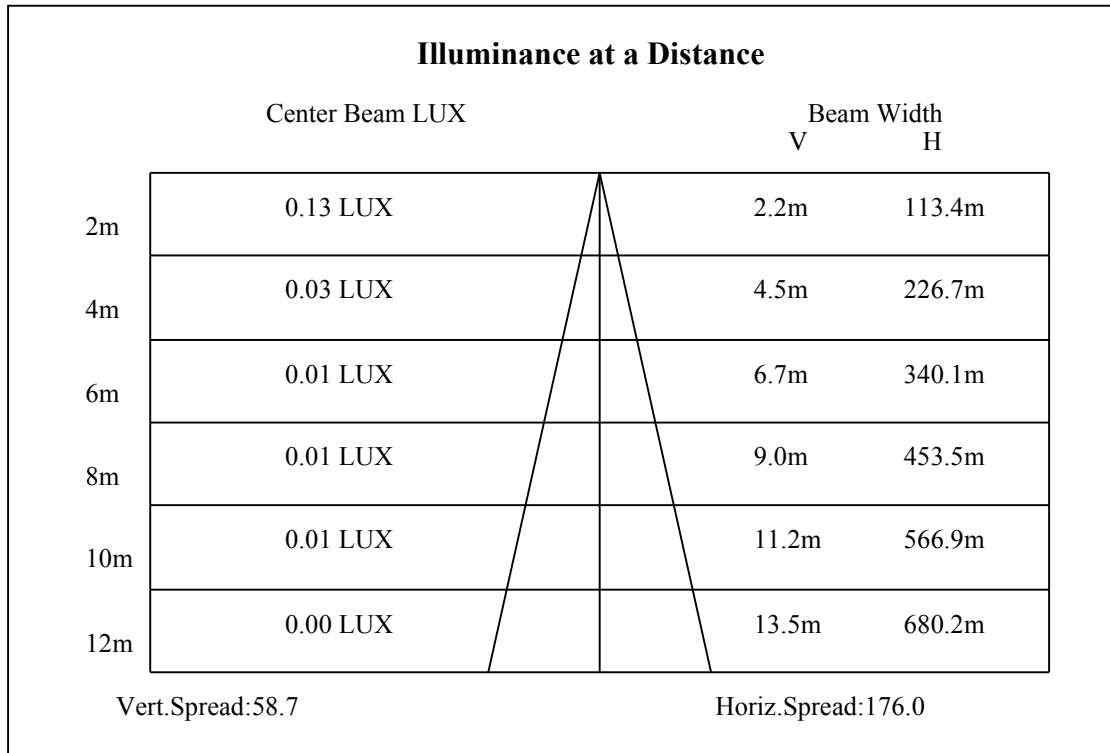

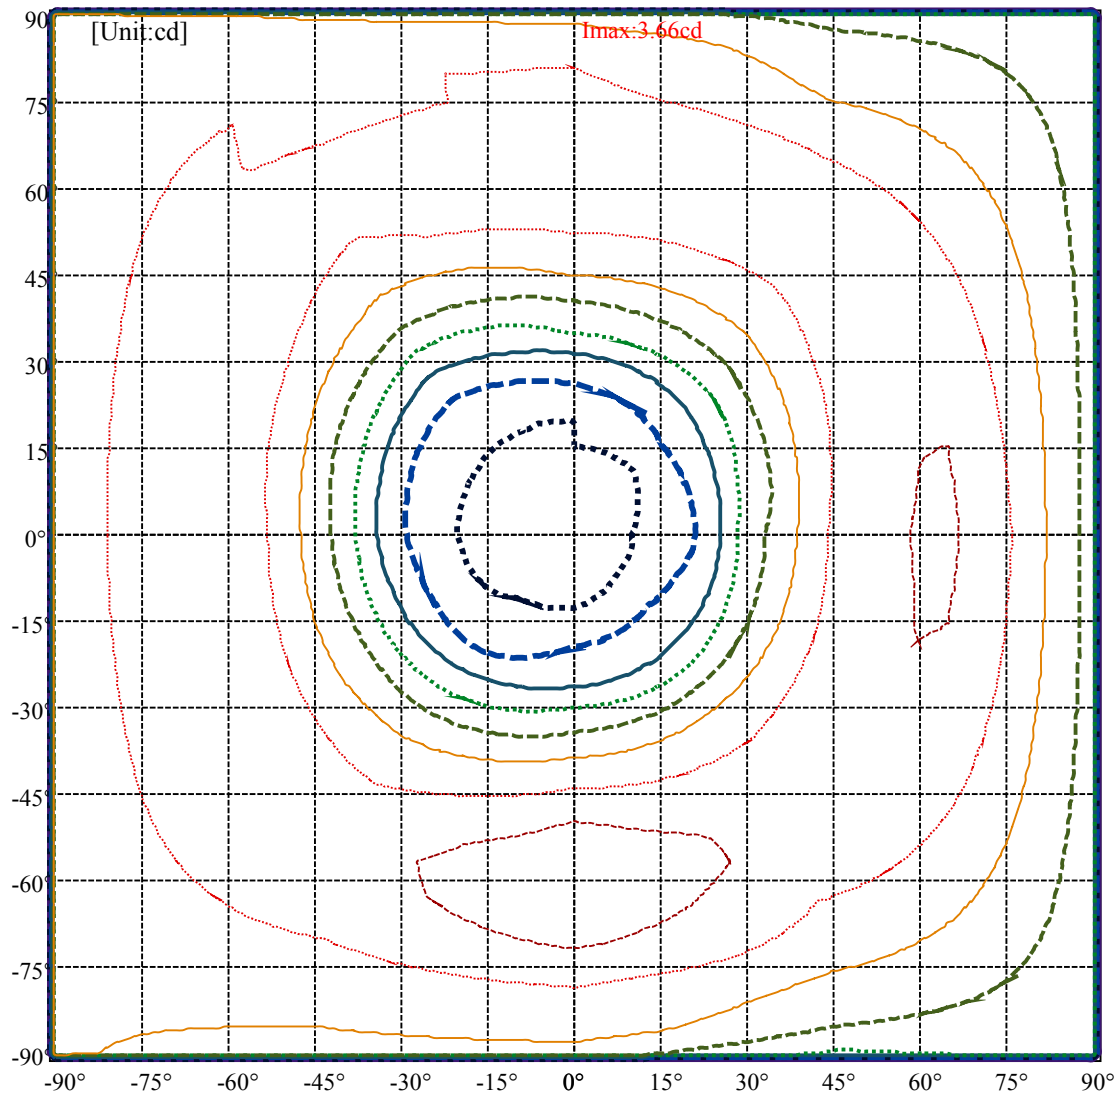

- (10%Imax) 0.365569 ————
- (20%Imax) 0.731139 ······
- (30%Imax) 1.09671 - - - -
- (40%Imax) 1.46228 ————
- (50%Imax) 1.82785 ······
- (60%Imax) 2.19342 - - - -
- (70%Imax) 2.55899 ————
- (80%Imax) 2.92456 ······
- (90%Imax) 3.29012 - - - -