


PQ3X2-BC


LumCAT: FB3CM0357 WW	Luminaire:
Report No:	Voltage(V): 240.300
Test No:	Current(A): 0.057
LampCAT: :	Power (W): 6.500
Lamp flux(lm): -1.0	PF: 0.472
Number of Lamps: 1	Ballast type:
Length(mm): 0	Width(mm): 0
Phm Type: C	Height(mm): 0


Photometric Results

Lumens(lm): 348.30
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 53.59
Central intensity(cd): 1654.443
Maximum intensity(cd): 1689.046
Angle of maximum intensity: C=90.0 γ =0.0
Beam Angle(50%lmax): [H]Left=10.0 Right=13.4
 [V]Left=11.2 Right=11.5
Field angle(10%lmax): [H]Left=19.9 Right=24.0
 [V]Left=21.9 Right=22.1
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0
Max Cd(80 to 90°Vert) : 0
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 57.67%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 42.33%of Luminaire

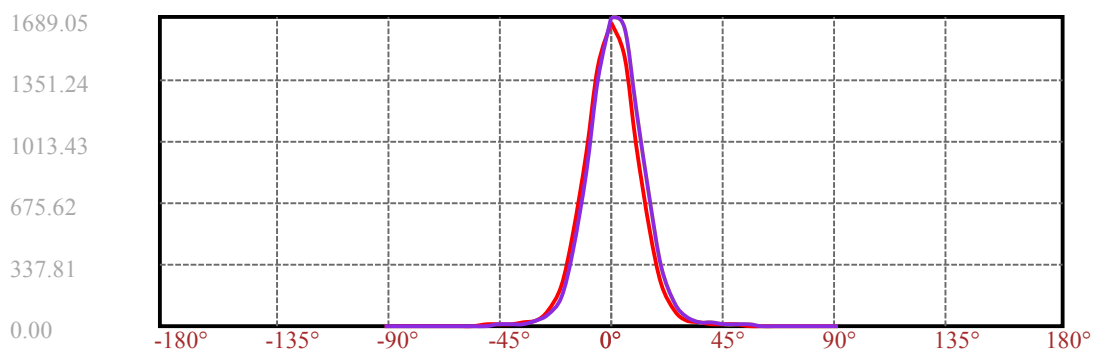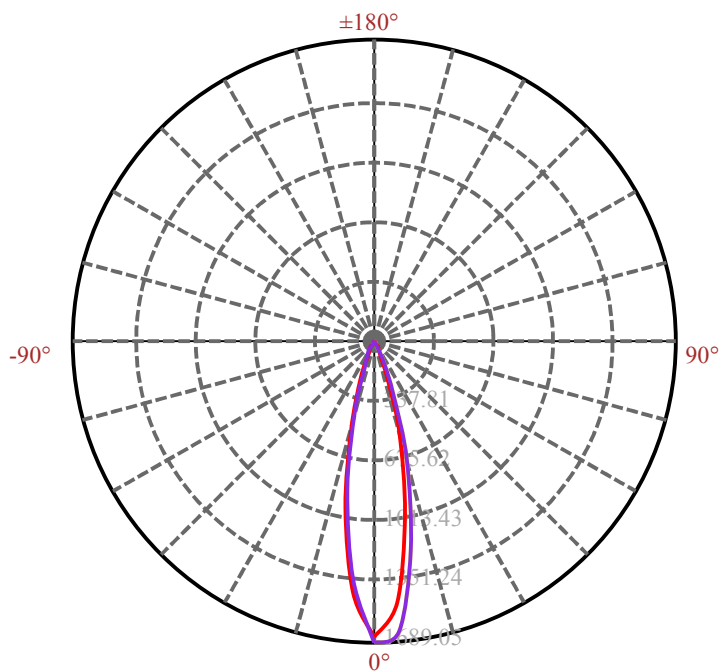

C90(Max): —
 C0/C180: —
 C90/C270: —

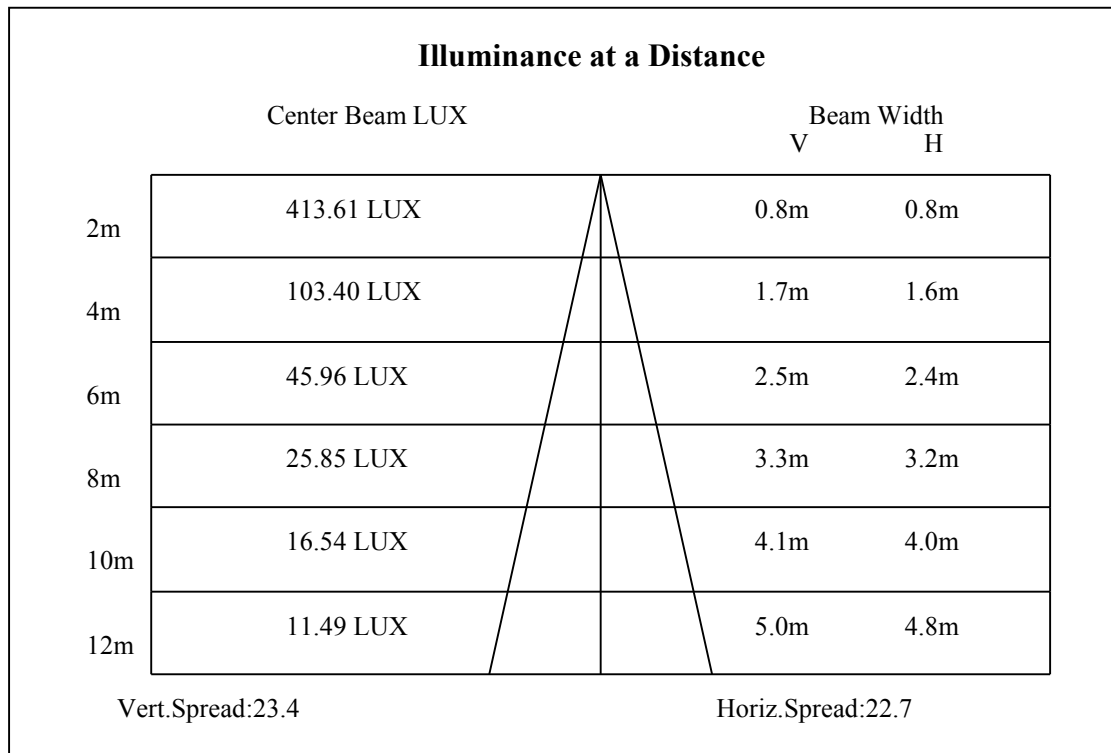

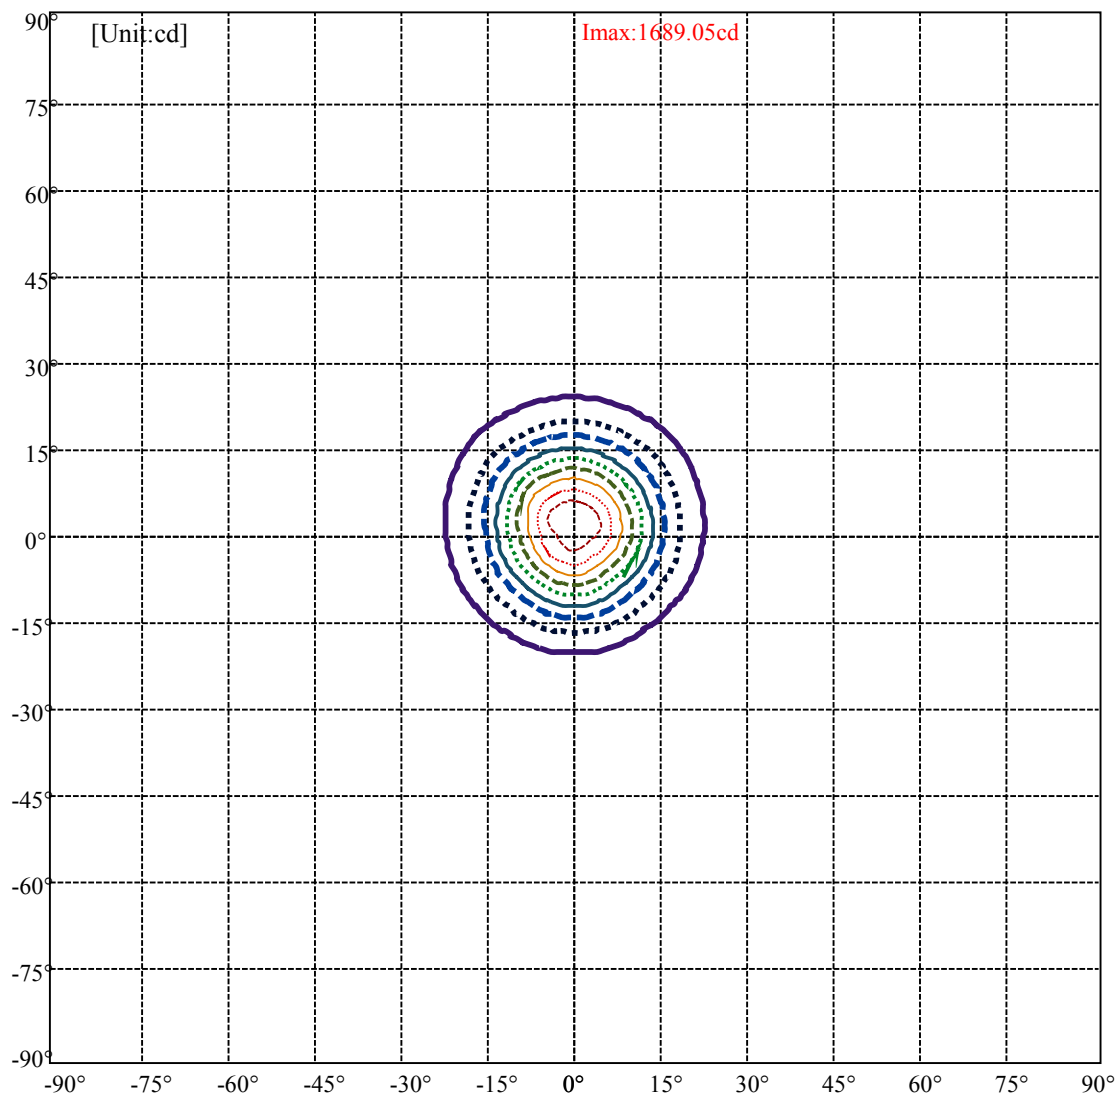

- (10%Imax) 168.905
- (20%Imax) 337.809
- (30%Imax) 506.714
- (40%Imax) 675.618
- (50%Imax) 844.523
- (60%Imax) 1013.43
- (70%Imax) 1182.33
- (80%Imax) 1351.24
- (90%Imax) 1520.14