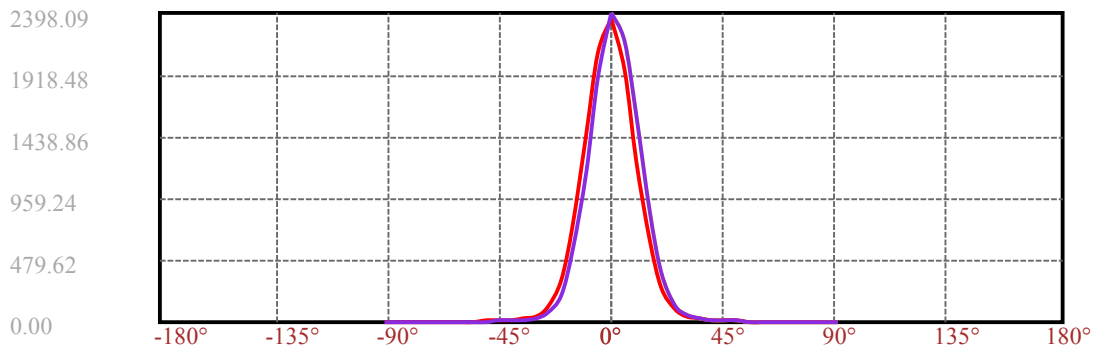
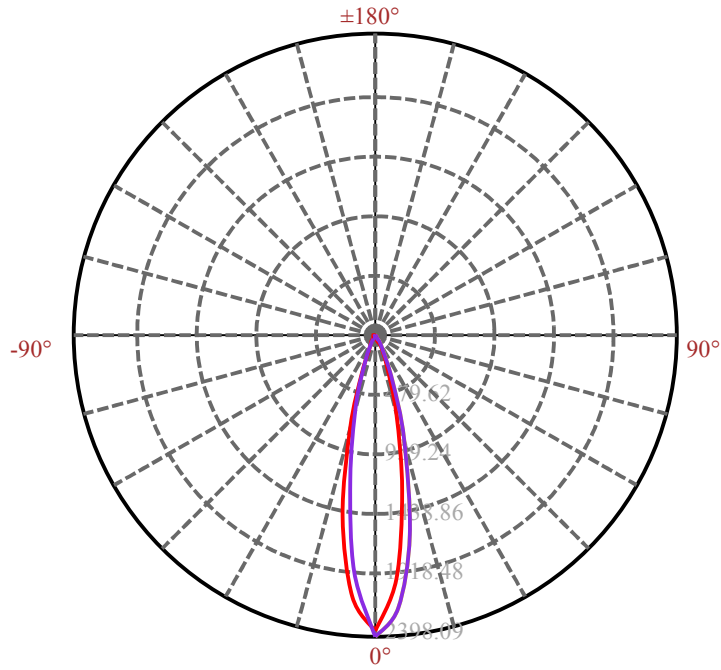

PQ3X2-BF

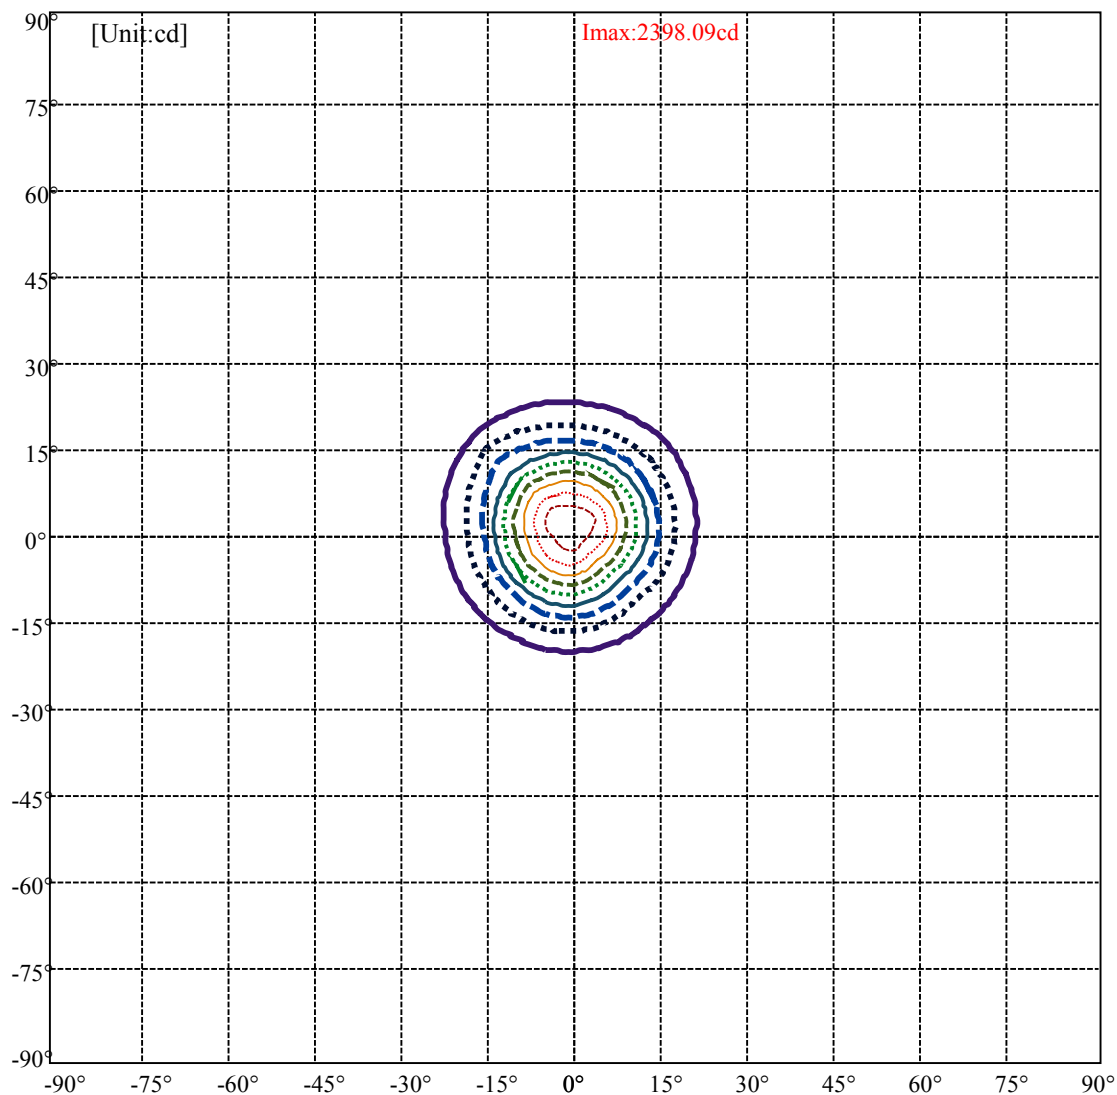
LumCAT: PQ3X2-BF	Luminaire:
Report No:	Voltage(V): 240.200
Test No:	Current(A): 0.056
LampCAT: :	Power (W): 6.400
Lamp flux(lm): -1.0 Number	PF: 0.474
of Lamps: 1 Length(mm): 0	Ballast type:
Phm Type: C	Width(mm): 0
	Height(mm): 0

Photometric Results

Lumens(lm): 476.12
Efficiency(%): 0.00%
Lumens(lm)/Power(W): 74.39
Central intensity(cd): 2353.005
Maximum intensity(cd): 2398.093
Angle of maximum intensity: C=90.0 γ =0.0
Beam Angle(50%Imax): [H]Left=9.8 Right=12.7
[V]Left=11.9 Right=10.4
Field angle(10%Imax): [H]Left=19.6 Right=23.0
[V]Left=22.0 Right=20.8
IES Classification : TypeI
Longitudinal Classification : VeryShort
Cut Off Classification : FullCutoff
Max Cd(At 90°Vert) : 0
Max Cd(80 to 90°Vert) : 0
Street Side UpWard Lumens: - -of Lamp 0.00%of Luminaire
Street Side DownWard Lumens: - -of lamp 57.23%of Luminaire
House Side UpWard Lumens: - -of lamp 0.00%of Luminaire
House Side DownWard Lumens: - -of lamp 42.77%of Luminaire



C90(Max): —————
C0/C180: —————
C90/C270: —————



(10%Imax) 239.809	———
(20%Imax) 479.619
(30%Imax) 719.428	- - - - -
(40%Imax) 959.237	———
(50%Imax) 1199.05
(60%Imax) 1438.86	- - - - -
(70%Imax) 1678.67	———
(80%Imax) 1918.47
(90%Imax) 2158.28	- - - - -