




Características técnicas / Technical data


| | |
|---|--------------------------|
| Alimentación/power supply | 12VAc |
| Led driver | Entrada Tensión Continua |
| Ángulo/angle | 120° |
| T° de trabajo/operating T° | -10°C~60°C |
| Cable de alimentación/power cable | 2 X 0.75 mm2---1,5 m |
| Tipo de control/dimmable support | ----- |
| Material/mounting sleeveen | ABC |
| Medidas/outer dimensions | 150X32.5mm |
| Medidas Nicho/recessed dimensions | ----- |
| Cubierta frontal/Front cover housing | ----- |
| Grosor de vidrio templado/Step tempered glass | T=3mm |

| Referencia Reference | Color Color | Fluj.lum. Lum.Flow | consumo Consume | Protección Protection | Tipo de led Light source |
|-------------------------|----------------|-----------------------|--------------------|--------------------------|-----------------------------|
| PEPLEDMINI-BC | 3000°K | 1200Lm | 12W | IP68 | 2835 |

MEDIDAS/ DIMENSIONS

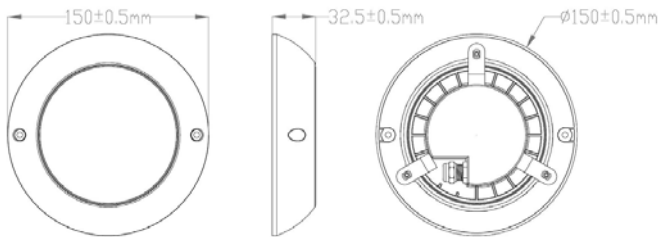

IMPORTANTE/IMPORTEN

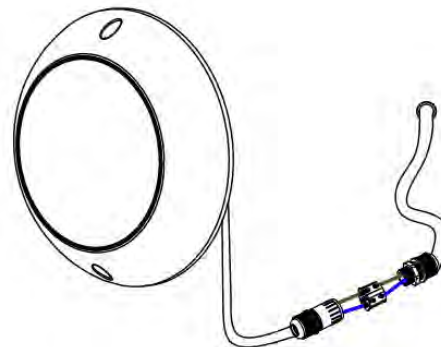

(1) Haga agujeros y coloque el tapón de goma /
Punch holes and put in the rubber stopper

(2) Conectar cables /Connect wires

