




Características técnicas / Technical data

Alimentación/ <i>power supply</i>	12VAc
Led driver	Entrada Tensión Continua
Ángulo/ <i>angle</i>	120°
T° de trabajo/ <i>operating T°</i>	-10°C~60°C
Cable de alimentación/ <i>power cable</i>	2 X 0.75 mm ² ---1,5 m
Tipo de control/ <i>dimmable support</i>	-----
Material/ <i>mounting sleeve</i>	ABC
Medidas/ <i>outer dimensions</i>	150X32.5mm
Medidas Nicho/ <i>recessed dimensions</i>	-----
Cubierta frontal/ <i>Front cover housing</i>	-----
Grosor de vidrio templado/ <i>Step tempered glass</i>	T=3mm

Referencia <i>Reference</i>	Color <i>Color</i>	Fluj.lum. <i>Lum.Flow</i>	consumo <i>Consume</i>	Protección <i>Protection</i>	Tipo de led <i>Light source</i>
PEPLEDMINI-BC	3000°K	1200Lm	12W	IP68	2835

MEDIDAS / DIMENSIONS

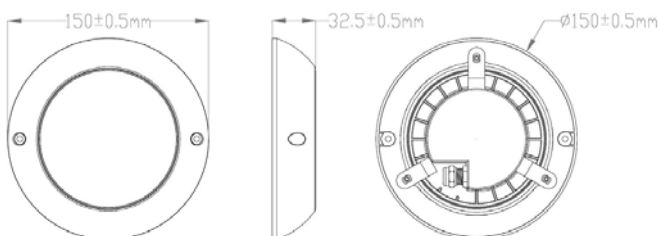

IMPORTANTE / IMPORTANT



(1) Haga agujeros y coloque el tapón de goma /
Punch holes and put in the rubber stopper

(2) Conectar cables /Connect wires

